

YSM5 SERIES



Input:85-277VAC 50/60Hz
Output Voltage: 3.3V-24V DC
Rated Power :5W max

Features


- Compact appearance
- International general input 85-277VAC
- No-load power consumption < 0.1 W
- EMC meets Class B requirements without additional components
- Wide operating temperature range from -30 °C to 70°C
- Protection type: short circuit / over load / over voltage
- Natural air cooling
- Class II isolation level
- By LPS
- Three Year Warranty



Application

- Industrial electrical installation
- Mechanical equipment
- Industrial automation equipment
- Handheld electronic equipment

■ Dimensions and Installation

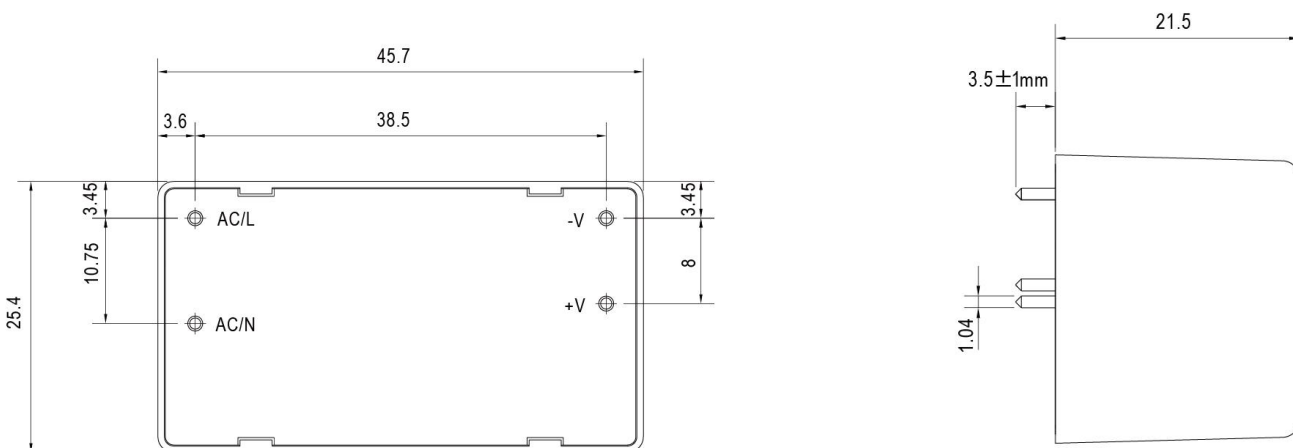


YSM5 SERIES

MODEL DETAIL SPEC.		YSM5-0331000	YSM5-0501000	YSM5-1200420	YSM5-1500330	YSM5-2400230
OUTPUT	DC Voltage:	3.3V	5V	12V	15V	24V
	Rated Current:	1A	1A	0.42A	0.33A	0.23A
	Rated Power:	4.125W	5W	5W	5W	5.5W
	Ripple and Noise:	200mVp-p	200mVp-p	200mVp-p	200mVp-p	200mVp-p
	Line Regulation:	±0.3%				
	Load Regulation:	±0.5%				
INPUT	Input Voltage:	85-277VAC 50/60Hz				
	Efficiency:	68%	71%	75%	75%	77%
	AC Current:	0.12A/115VAC 0.08A/230VAC 0.06A/277VAC				
	Inrush Current:	COLD START 20A/115VAC 40A/230VAC				
	Leakage Current:	< 0.25mA/277VAC				
PROTECTION	Over Load Protection:	115% ~ 260% rated output power, Protection type: Hiccup Mode recovers automatically after fault condition is removed				
	Over Voltage Protection:	115% ~ 135%, Protection Type: Clamp by Zener Diode				
SAFETY & EMC	Safety Regulations:	IEC62368-1, UL62368-1, TUV EN62368-1, EAC TP TC 004, -1 approved				
	Withstand Voltage:	I/P-O/P:3KVAC				
	EMC Emission:	EN55032(CISPR32), CNS13438, EN61000-3-2 Class A, EN61000-3-3				
OTHER	MTBF:	> 50000h				
	Size:	45.7*25.4*21.5 mm				


YSM5 SERIES

Deduction curve and temperature

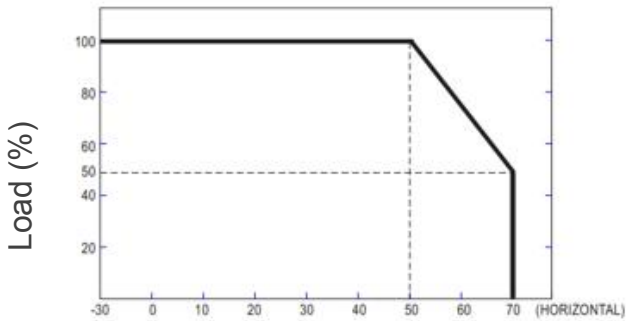

Environment temperature(°C)

Minus output and input voltage curves

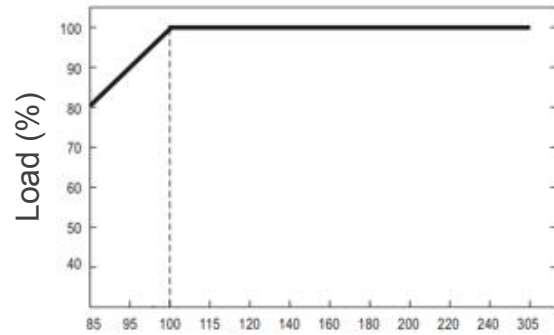

Input voltage(VAC)

Functional Diagram

